



AVK TOP FRAME SERVICE CONNECTION VALVES

80/46
051



AVK top frame for service connection valves.
Recommended to use in green zones and pedestrian areas.



Types


- Top frame
 - Standard black colour
 - Optional various colours

Top frame service connection valves is suitable for surface boxes DIN4057P, DIN4059, Purdie and Normpot Afsluiter





Features

- Protection of surface box in green zones and pedestrian areas
- Top frame improves visibility of surface box
- Weight reduction compared to concrete top frame
- Top frame improves access to surface box in green zones as grass will not overgrow the surface box
- Ribs in housing ensure optimal fixation

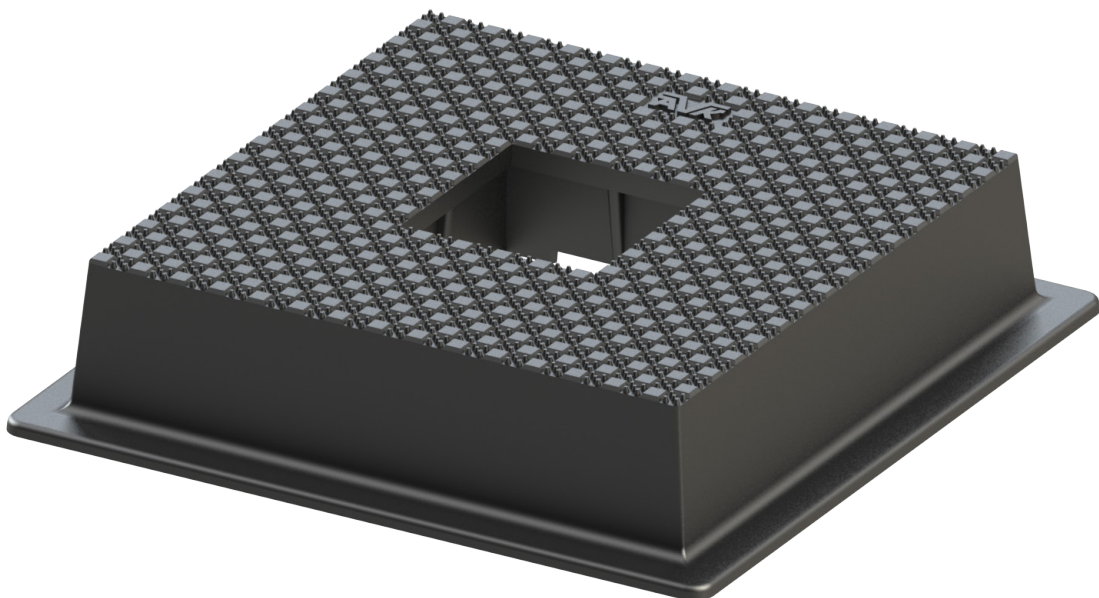

Expect... **AVR**

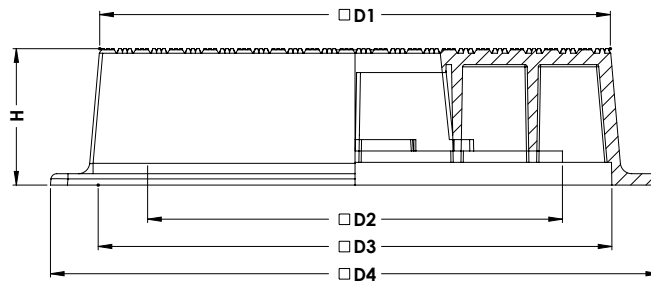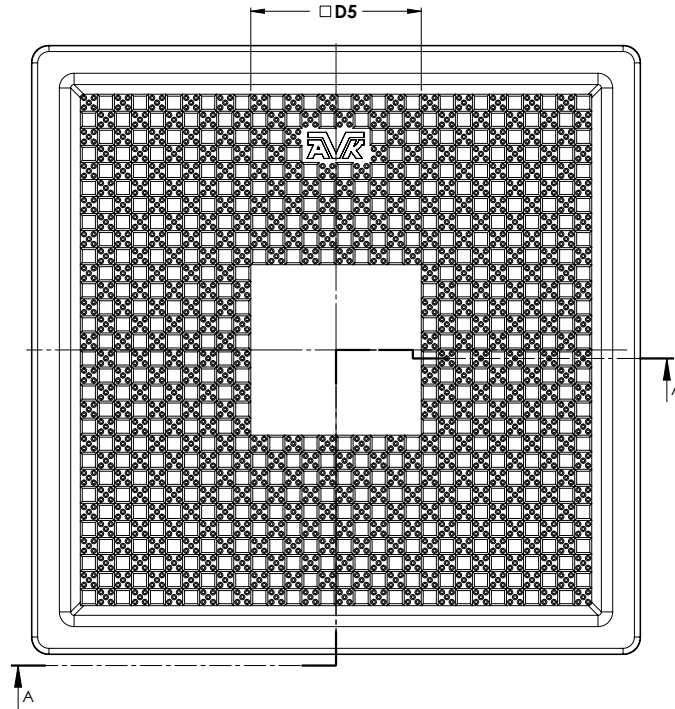

SECTION A-A

Component list

Top frame	HDPE
-----------	------

Reference nos. and nominal dimensions

AVK ref. nos.	D1 mm	D2 mm	D3 mm	D4 mm	D5 mm	H mm	Total weight in kg
80-46-00051	450	365	452	536	150	120	6.0