



## AVK TOP FRAME SERVICE CONNECTION VALVES

80/46  
051



AVK top frame for service connection valves.  
Recommended to use in green zones and pedestrian areas.



### Types


- Top frame
  - Standard black colour
  - Optional various colours

Top frame service connection valves is suitable for surface boxes DIN4057P, DIN4059, Purdie and Normpot Afsluiter





### Features

- Protection of surface box in green zones and pedestrian areas
- Top frame improves visibility of surface box
- Weight reduction compared to concrete top frame
- Top frame improves access to surface box in green zones as grass will not overgrow the surface box
- Ribs in housing ensure optimal fixation

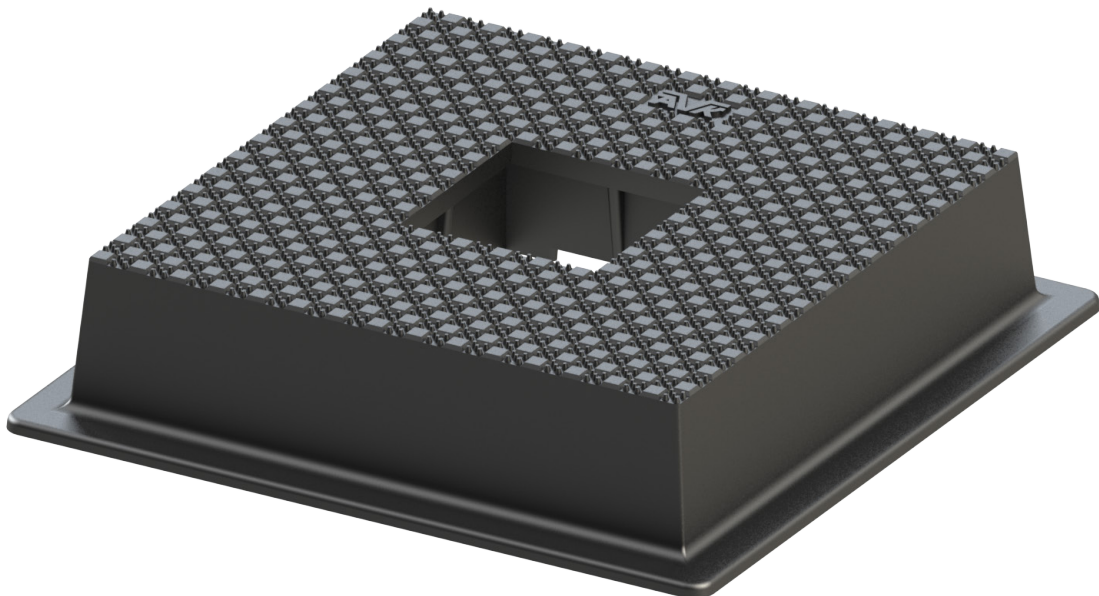

Expect... **AVR**

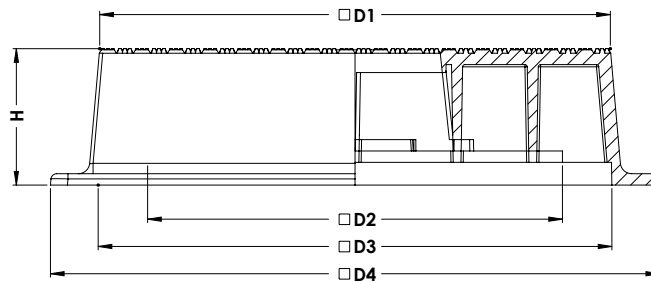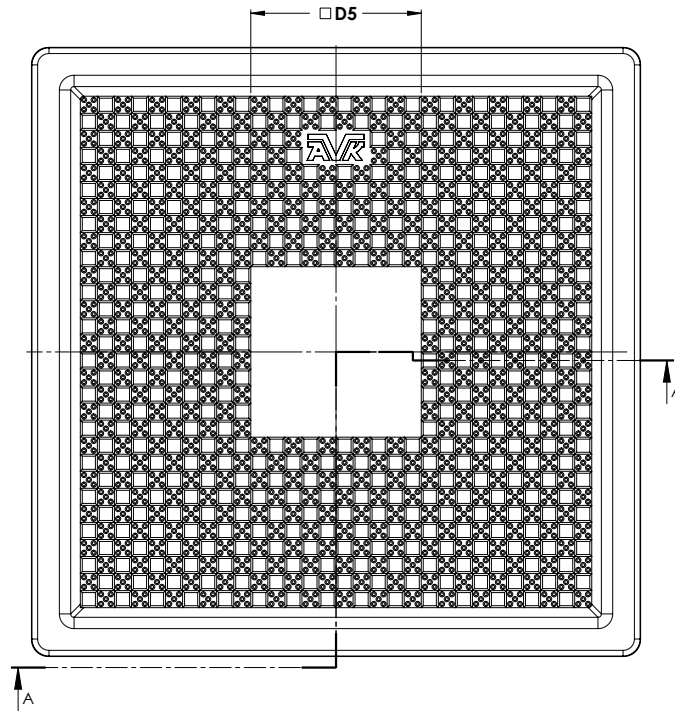

SECTION A-A

**Component list**

Top frame	HDPE
-----------	------

**Reference nos. and nominal dimensions**

AVK ref. nos.	D1 mm	D2 mm	D3 mm	D4 mm	D5 mm	H mm	Total weight in kg
80-46-00051	450	365	452	536	150	120	6.0