



AVK SURFACE BOX H-4055VF HD-GG

80/30
300



Height adjustable with Fugenring
Surface box for underground hydrants
Standard lid inscription: HYDRANT



Types

- H-4055VF HD-GG
 - Oval cast iron lid
 - Oval top surface box



Features

- Lightweight, maintenance free and noiseless design
- 100% recyclable and less use of energy resources compared to traditional materials
- Ribs in housing ensure optimal fixation in road foundation
- Selected materials for housing and lid ensure easy opening at all times
- Various colours and lid inscriptions possible
- Available as lockable version making the surface box tamperproof
- Heat resistant to max. 240 °C
- Large height range and flexible positioning of top part
- Inscription in lid to be positioned easily
- No costly corrections after installation
- Reinforced rim ensures better support of top part
- Durable joint between tarmac and surface box
- Installation according to ZTV Fug-StB 15 guidelines

Standards

- Design according to DIN4055
- DVGW VP310-2, EN124 test method


Accessories

- Support tile II



31.8 kg
CO2 eq.

Expect... **AVR**

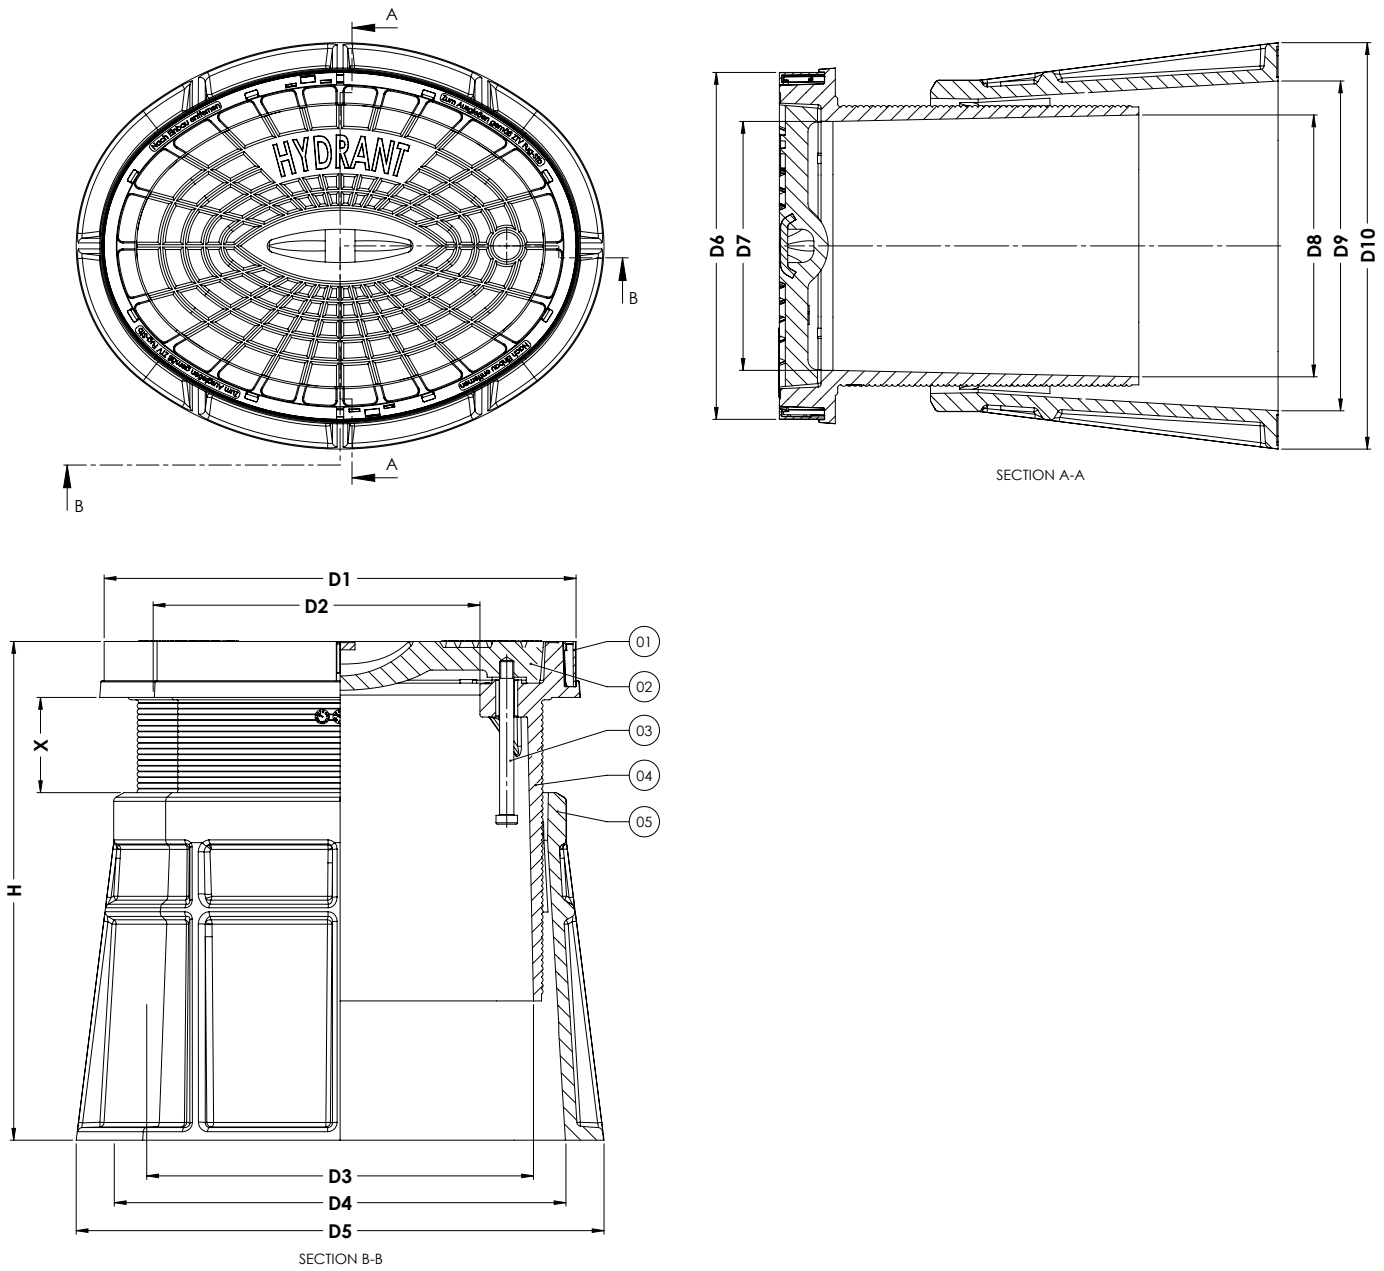

Component list

1. Fugenring	PA
2. Lid	EN-GJL-200
3. Bolt M12x130 hexagon socket head	A2-70
4. Housing top part	PA+
5. Housing bottom part	PA+

Reference nos. and nominal dimensions

AVK ref. nos.	D1 mm	D2 mm	D3 mm	D4 mm	D5 mm	D6 mm	D7 mm	D8 mm	D9 mm
80-30-3900000	397	275	325	380	444	292	210	220	277
	D10 mm	H mm	X mm	Weight box in kg	Weight lid in kg	Total weight in kg			
	342	419-554	80-215	8.1	10.8	18.9			