




AVK ACCESSORIES

FLEXDRAINS

The AVK flexdrain full size with a clear opening of $\varnothing 250\text{mm}$ is the original type of flexdrain, existing out of two shells. An optimized version is the flexdrain full size with a clear opening of $\varnothing 145\text{mm}$, existing out of one strong hinged piece. This type is also available as half size version.

The flexdrain low drain point (LDP) is similar to a full size flexdrain, but with a cut-away for hydrants with a low drain point. The flexdrain free flow (FF) is a specific model for the AVK free flow hydrant.

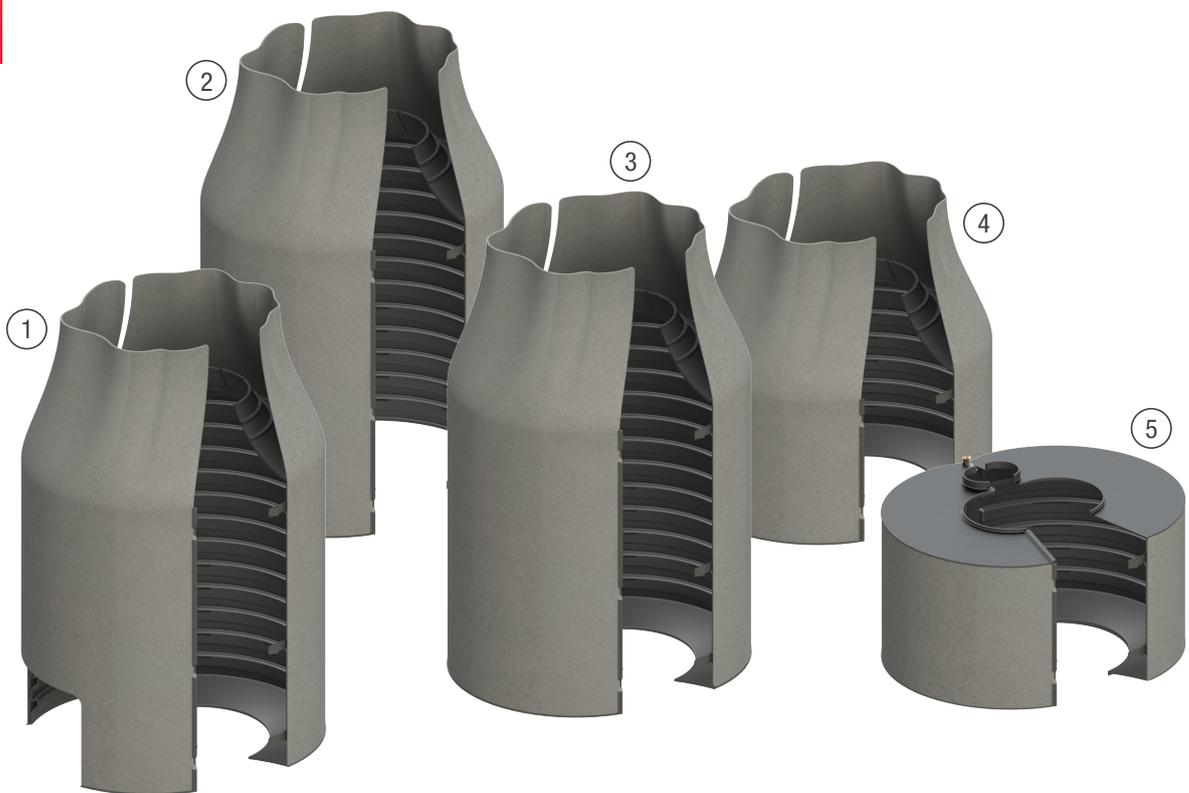

VERSIONS

Five versions available:


1. Low Drain Point clear opening $\varnothing 145$; One strong hinged piece
2. Full Size clear opening $\varnothing 250$; Existing out of two shells
3. Full Size clear opening $\varnothing 145$; One strong hinged piece
4. Half Size clear opening $\varnothing 145$; One strong hinged piece
5. Free Flow clear opening $\varnothing 145$; One strong hinged piece



AVK ACCESSORIES

FLEXDRAINS

AVK flexdrains for underground hydrants DN80 and DN100 ensure an optimal and quick drainage of water into the flexdrain and subsequently into the ground. Without using a flexdrain remaining water can freeze resulting in hydrant failure or breakage. The drawings below demonstrate the functioning of the regular flexdrains (1-4) and the free flow flexdrain (5).

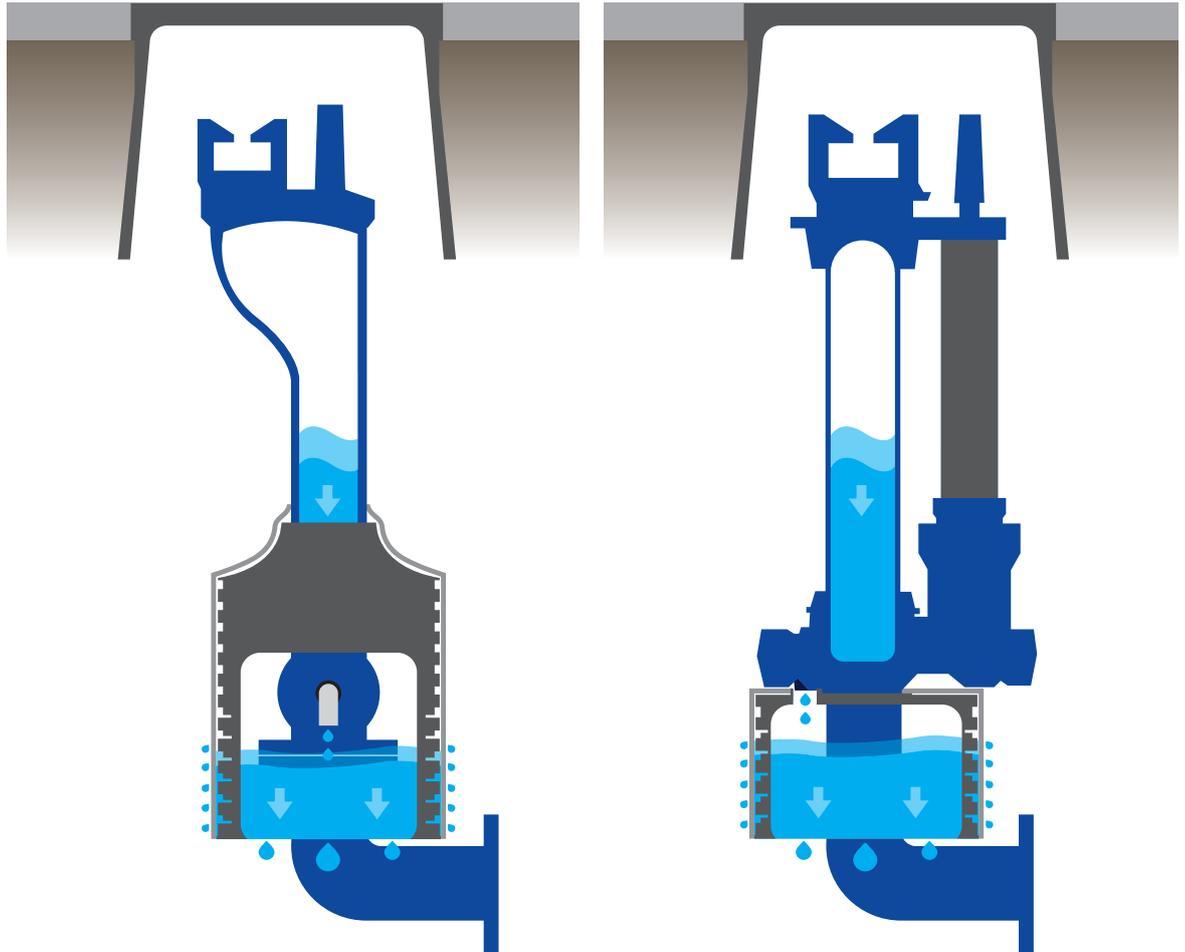

FEATURES

- Easy installation with snap closure, no tools required and low weight
- Prevents ingress of dirt and vegetation growth in the drainage area
- Universal application and patented design
- Environmentally friendly materials; 100% recyclable
- Drainage fleece conforming EN13252
- Durable design and solid edges
- Drain capacity Half Size flexdrain: 6 L.
- Drain capacity Full Size flexdrain: 12 L.