

Free flow

Water Supply

Wastewater Treatment

Fire Protection


AVK offers various types of Flexdrains which can be easily installed around underground hydrants or air valves. AVK Flexdrains prevent dirt obstructing in- and outlets and enable sufficient drainage of water after using the hydrant. This avoids water remaining inside the hydrant preventing it to freeze or break. AVK Flexdrains are made of high grade polypropylene making them lightweight, easy to handle and recyclable.

Use:


Half size synthetic flexdrain for Free Flow hydrants

Features:

- Easy installation with snap closure, no tools required and low weight
- 100% recyclable
- Prevent ingress of dirt and vegetation growth in the drainage area
- Durable; Flexdrain exists out of two strong shells
- Environmentally friendly materials
- Drainage fleece conforming to EN13252
- Universal application and patented design

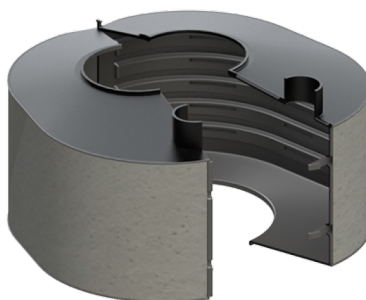

The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.

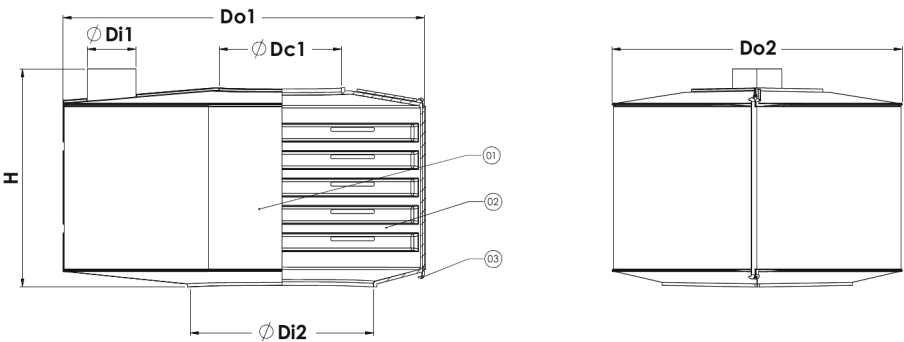

Component list:

1.	Drainage fleece	Polyester spunbond geotextile	3.	Band	Rubber
2.	Body	PP			

Metallic components may be substituted with equivalent or higher-grade materials without prior notice, provided that this is in compliance with the approvals.

Reference nos. and dimensions:

Reference no.	Do1	Do2	Dc1	Di1	Di2	H3	Theoretical weight/kg
	mm	mm	mm	mm	mm	mm	
80-60-00003	294	236	100	35	149	178	0.6