

SYNTHETIC SURFACE BOX TYPE 4055

80/30-300

For underground hydrants, H-4055VF HD-GG, Classic

Fire Protection

AVK offers a wide range of fixed and height adjustable surface boxes in various dimensions, which can be used in many fields of application. Apart from economic benefits, AVK synthetic surface boxes are lightweight, user-friendly, easy to open, noiseless and maintenance free. Most of AVK surface boxes are designed and approved according to DIN/EN standards, but can also be designed according to local standards or customer specifications. The carbon footprint (CO₂ emission) of synthetic surface boxes, measured from resource to end of life, is significantly lower compared to surface boxes made of traditional materials, making AVK surface boxes ecologically sound.

Use:
Height adjustable surface box with cast iron lid and "Fugenring", for underground hydrants, standard lid inscription: HYDRANT

Features:

- Lightweight, user-friendly, silent and maintenance free
- 100% recyclable and significantly less use of resources compared to traditional materials
- Manufactured out of high grade recycled materials
- Ribs in housing ensure optimal fixation in road foundation
- Selected materials for housing and lid ensure easy opening at all times
- Heat resistant to max. 250 °C and suitable for low-temperature applications
- Large height range and flexible positioning of top part
- No height adjustment needed after installation, saving time and costs
- Floating top part following road settlement ensuring perfect alignment at all times
- Reinforced rim ensures better support of top part
- Durable joint between tarmac and surface box
- Installation according to ZTV Fug-StB 15 guidelines
- D400 load bearing capacity on complete surface*

Design/Test/Approval:

- Designed according to DIN 4055
- Tested according to DIN 3580-2
- DVGW certificate DW-4530BN0469

Optional

- Spring around bolt ensuring lid will stay in its place
- Various colours and lid inscriptions possible
- Available as lockable version making the surface box tamperproof
- Use of a Flexdrain around the hydrant prevents dirt to block the drain pipe, ensuring optimal operation

**Results of the load-bearing capacity test on the complete surface, following the internally used load application method, and declaring the load-bearing capacity according to the corresponding class as per EN 124-1:2015, clause 7.2, table 4*

Accessories:

Support tile II & Support tile III




The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.

SYNTHETIC SURFACE BOX TYPE 4055

For underground hydrants, H-4055VF HD-GG, Classic

80/30-300

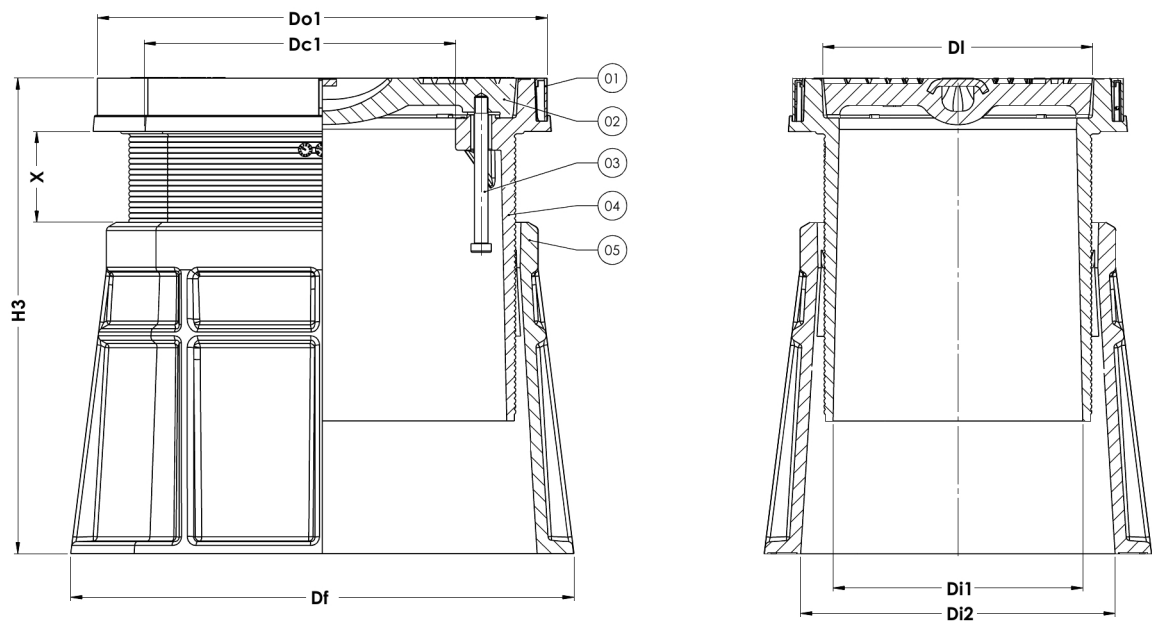

Component list:

1. Fugenring	PA 6	4. Housing top part	PA+
2. Lid	Cast iron GJL-200 (GG-20)	5. Housing bottom part	PA+
3. Bolt, socket head	Stainless steel A2-70		

Metallic components may be substituted with equivalent or higher-grade materials without prior notice, provided that this is in compliance with the approvals.

Reference nos. and dimensions:

Reference no.	Do1 mm	DI mm	Dc1 mm	Di1 mm	Di2 mm	Df mm	H3 mm	X mm	Weight Box / kg	Weight Lid / kg	Theoretical weight/kg
80-30-3000000	397/292	345/240	275/210	325/220	380/277	444/342	419-554	80-215	8.1	10.8	18.9