

Water Supply

Wastewater Treatment

Gas Supply

AVK offers a wide range of fixed and height adjustable surface boxes in various dimensions, which can be used in many fields of application. Apart from economic benefits, AVK synthetic surface boxes are lightweight, user-friendly, easy to open, noiseless and maintenance free. Most of AVK surface boxes are designed and approved according to DIN/EN standards, but can also be designed according to local standards or customer specifications. The carbon footprint (CO₂ emission) of synthetic surface boxes, measured from resource to end of life, is significantly lower compared to surface boxes made of traditional materials, making AVK surface boxes ecologically sound.

Use:

Fixed height surface box with synthetic lid and square top, for service connection valves, design derived from DIN 4057, standard lid inscription: AVK W

Features:

- Lightweight, user-friendly, silent and maintenance free
- 100% recyclable and significantly less use of resources compared to traditional materials
- Manufactured out of high grade recycled materials
- Ribs in housing ensure optimal fixation in road foundation
- Selected materials for housing and lid ensure easy opening at all times
- Heat resistant to max. 250 °C
- Suitable for low-temperature applications
- Due to square top ideal solution for pavement installation
- Locking clip around the bolt ensuring lid will stay in its place
- Lid material discourages thieves; no value in stealing
- Synthetic lid enables signal transmission
- C250 load bearing capacity on complete surface*

Design:

- Design derived from DIN 4057

Optional

- Spring around bolt ensuring lid will stay in its place
- Various colours and lid inscriptions possible
- Available as lockable version making the surface box tamperproof

*Results of the load-bearing capacity test on the complete surface, following the internally used load application method, and declaring the load-bearing capacity according to the corresponding class as per EN 124-1:2015, clause 7.2, table 4

Accessories:

Support tile UST


Top frame service connection



SYNTHETIC SURFACE BOX TYPE 4057

80/32-204

For service connection valves, H-4057P MD-KU, Classic

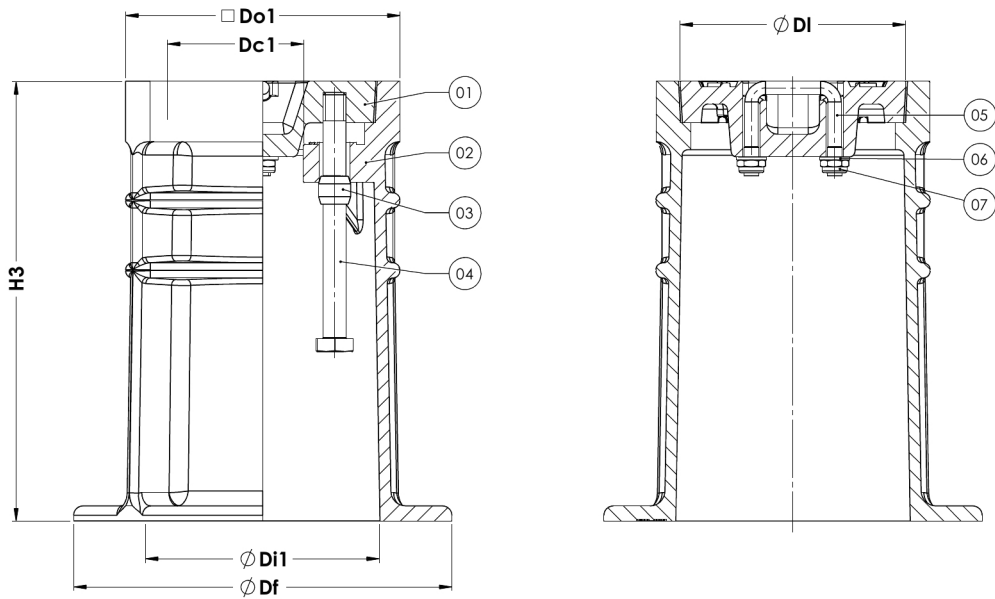

Component list:

1. Lid	PP GF40	5. Crossbar	Stainless steel A2
2. Housing	PA+	6. Washer	Stainless steel A2
3. Locking clip	PP	7. Nut	Stainless steel A2
4. Bolt, hexagon head	Stainless steel A2-70		

Metallic components may be substituted with equivalent or higher-grade materials without prior notice, provided that this is in compliance with the approvals.

Reference nos. and dimensions:

Reference no.	Do1	DI	Dc1	Di1	Df	H3	Weight	Weight	Theoretical
	mm	mm	mm	mm	mm	mm	Box / kg	Lid / kg	weight/kg
80-32-2040006 (1)	145	121	108 / 76	124	200	232	1.4	0.4	1.8
80-32-2040007 (2)	145	121	108 / 76	124	200	232	1.4	0.4	1.8
80-32-2040008 (3)	145	121	108 / 76	124	200	232	1.4	0.4	1.8
80-32-2040009 (4)	145	121	108 / 76	124	200	232	1.4	0.4	1.8
(1) Black lid; inscription AVK W									
(2) Black lid; inscription AVK GAS									
(3) Blue lid; inscription AVK W									
(4) Yellow lid; inscription AVK GAS									

The designs, materials, dimensions and specifications shown are subject to change without notice due to the continuous development of our product range.