



AVK SYNTHETIC SURFACE BOX TYPE 4057

80/32-800

For service connection valves, H-4057VP HD-GG, Classic

AVK offers a wide range of fixed and height adjustable surface boxes in various dimensions, which can be used in many fields of application. Apart from economic benefits, AVK synthetic surface boxes are lightweight, user-friendly, easy to open, noiseless and maintenance free. Most of AVK surface boxes are designed and approved according to DIN/EN standards, but can also be designed according to local standards or customer specifications. The carbon footprint (CO₂ emission) of synthetic surface boxes, measured from resource to end of life, is significantly lower compared to surface boxes made of traditional materials, making AVK surface boxes ecologically sound.

Product description:

Height adjustable surface box with cast iron lid and square top, for service connection valves, design derived from DIN 4057, standard lid inscription: W

Features:

- Lightweight, user-friendly, silent and maintenance free
- 100% recyclable and significantly less use of resources compared to traditional materials
- Manufactured out of high grade recycled materials
- Ribs in housing ensure optimal fixation in road foundation
- Selected materials for housing and lid ensure easy opening at all times
- Heat resistant to max. 250 °C
- Suitable for low-temperature applications
- Large height range and flexible positioning of top part
- Inscription in lid to be positioned easily
- No height adjustment needed after installation, saving time and costs
- Floating top part following road settlement ensuring perfect alignment at all times
- O-ring only to be used for determining final position of top part
- D400 load bearing capacity on complete surface*

Design:

- Design derived from DIN 4057

Optional

- Available as lockable version making the surface box tamperproof
- Various colours and lid inscriptions possible
- Spring around bolt ensuring lid will stay in its place

*Results of the load-bearing capacity test on the complete surface, following the internally used load application method, and declaring the load-bearing capacity according to the corresponding class as per EN 124-1:2015, clause 7.2, table 4

Accessories:

Support tile UST




Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

AVK SYNTHETIC SURFACE BOX TYPE 4057
For service connection valves, H-4057VP HD-GG, Classic

80/32-800

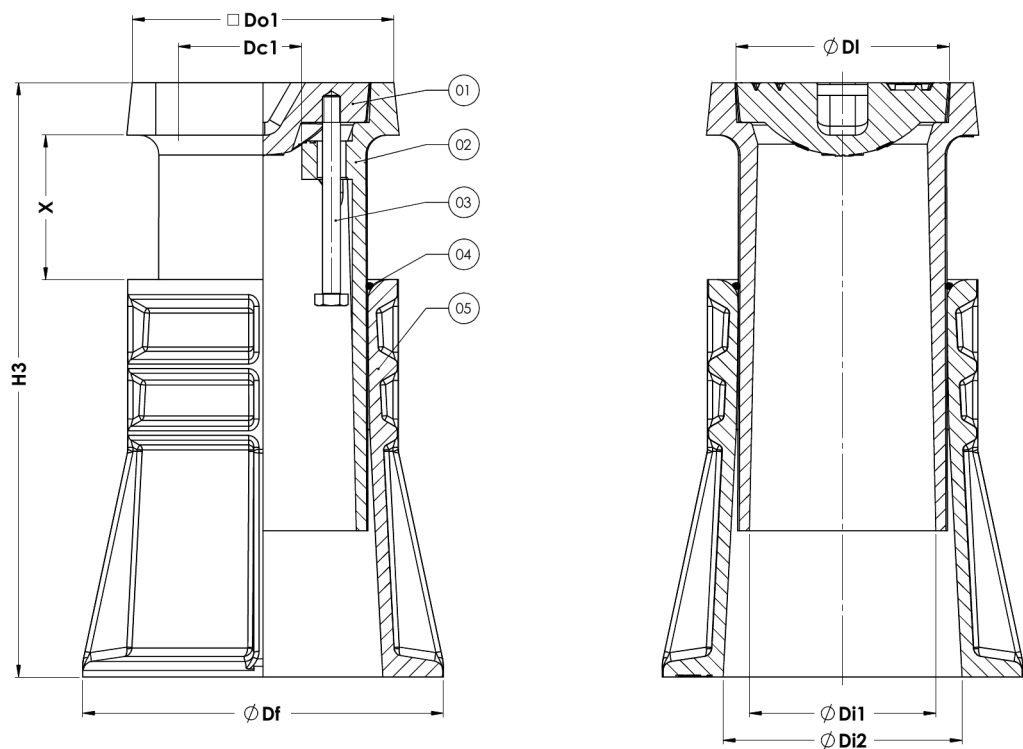

Component list:

1. Lid	Cast iron GJL-250 (GG-25)	4. O-ring	EPDM rubber
2. Housing top part	PA+	5. Housing bottom part	PA+
3. Bolt, hexagon head	Stainless steel A2-70		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	Do1	DI	Dc1	DI1	DI2	Df	H3	X	Weight	Weight	Theoretical
	mm	mm	mm	mm	mm	mm	mm	mm	Box / kg	Lid / kg	weight/kg
80-32-8000001	145	121	94 / 68	103	200	200	330-430	80-180	2.1	1.7	3.8
80-32-8000002											3.8